


Digital Video Recorder NDR-EA4104

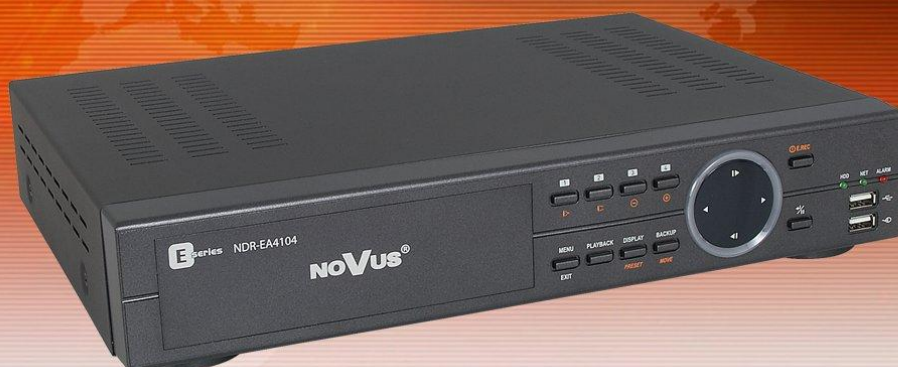

Charakteristik

- PENTAPLEX: simultaneous recording, live monitoring/playback, backup, mirroring and networking
- Operating system based on Linux
- Real-time display
- Recording speed: up to 100 fps
- H.264 compression
- Recording resolution:
 - 720 x 576
 - 720 x 288
 - 360 x 288
- Supports 1 SATA HDD (2nd HDD installation possible with additionally purchased mounting kit)
- Recording speed and quality defined individually for each camera
- Advanced schedule recording & motion detection functions
- Pre- & post-alarm functions
- Recording time estimation function
- 4-channel real-time audio recording
- External devices support ("Text-in" feature): ATM, POS, AC etc.
- Advanced search functions of recorded images
- PTZ control directly from the device or through the network
- Protocols: N-Control, Pelco-D, Pelco-P and others
- NV-KBD70 & NV-KBD30 keyboards compatible
- Possibility of installing DVD-RW drive (option)
- Backup: onto HDD or USB Flash Memory through USB port, CD/DVD (option) & through the network
- Networking (simultaneous connections with multiple DVRs and alarm e-mail notification)
- Software: E-Viewer application for remote administration, live monitoring and recorded data search with a built-in callback module (E-Viewer Callback), iMon application for live monitoring, receiving information on alarm events, alarm output control, DVR configuration from iPhone and Android OS devices
- Self-diagnostic functions with automatic notification
- User friendly multi-lingual OSD
- Covert camera function
- IR remote control and PC mouse control (in-set included)
- Power supply: 12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)

Parameter	Beschreibung
Betriebsmodus	PENTAPLEX
Betriebssystem	Linux
Videoeingänge	4 x BNC, loop-through
Videoausgänge	Main Monitor (1 x BNC, 1 x VGA), Spot Monitor (1 x BNC)
Alarめingänge	4
Alarmausgänge	2 OC, 2 relay output
Audioeingänge	4 x RCA (Line-in)

Parameter	Beschreibung
Audioausgänge	1 x RCA
Aufnahmegeschwindigkeit	Up to 100 fps (360 x 288), up to 50 fps (720 x 288), up to 25 fps (720 x 576)
Kompressionsverfahren	H.264
Auflösung (Aufnahme)	720 x 576, 720 x 288, 360 x 288
Aufnahmemodi	Time-lapse, Event (Alarm, Motion detection and/or "Text-in")
Anzeigegeschwindigkeit	100 fps (real-time)
Anzeigeformat	Full screen, 4, PiP, sequence, user defined, digital zoom of a chosen screen area: 2x, freeze image function
Bewegungserkennung	720 detection windows (30x24 grid) with sensitivity defined individually for each channel
Erkennung von Signalausfall	Yes
Aufnahmezeitplan	individually adjustable for each day/specific days (holidays etc.) per camera, combination of individual recording modes possibility
Effiziente Suchfunktion	By date/time, events or "Text-in"
Alarm-Ereignisauflistung	Up to 10 000 alarm events
Zeitsynchronisation	Automatic time synchronization with NTP server
Systemdiagnostik	Automatic control of HDD bad sectors number ("Health") & temperature status with local and network notification function
Festplattenspeicher	Supports 1 SATA HDD* (2nd HDD instalation possible with additionally purchased mounting kit)
Backup	Onto CD/DVD (option), HDD or USB Flash Memory through USB port, through the network
Mirroring	Automatic backup onto internal HDDs
Externe Ports	1 x Ethernet - RJ-45 interface, 10/100 Mbps/s, 1 x USB 2.0 for external drives (HDD, Flash Memory), 1 x USB 1.1 for PC mouse, 1 x RS-485 & 1 x RS-232 for PTZ cameras, NV-KBD70 & NV-KBD30 keyboards, POS, ATM, AC etc.
PTZ-Steuerung	Directly from the device or through the network
Verfügbare Steuerprotokolle	N-Control, Pelco-D, Pelco-P and others
DVR-Bedienung	Front panel, IR remote controller (in-set included), Network (E-Viewer, iMon, IE), NV-KBD70 & NV-KBD30 keyboards, USB PC mouse (in-set included)
Funktionsmenü	Multi-lingual On Screen Display (OSD)
Software	E-Viewer, iMon
Passwortschutz	Creation of user groups and accounts with diverse grants, password protection
Systemsicherung	Hardware WATCHDOG function
Betriebsspannung	12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)
Leistungsaufnahme	Approx. 40 W with 2 HDDs
Temperaturbereich	5°C ~ 40°C
Relative Feuchtigkeit	0% ~ 80% (non-condensing)
Abmessungen (HxBxT)	340 (W) x 67 (H) x 265 (D)
Gewicht	2 kg (without HDD)
*	The list of recommended disk models and their capacity is available on Novus Security website in the Compatible Disks file in the product tab